


www.faam.com

CATALOGO BATTERIE PER USO STAZIONARIO


STAND-BY BATTERY CATALOGUE
CATALOGUE DES BATTERIES STATIONAIRES
KATALOG DER ORTSFESTEN BATTERIEN
CATALOGO BATERIAS ESTACIONARIAS

LOOK AHEAD

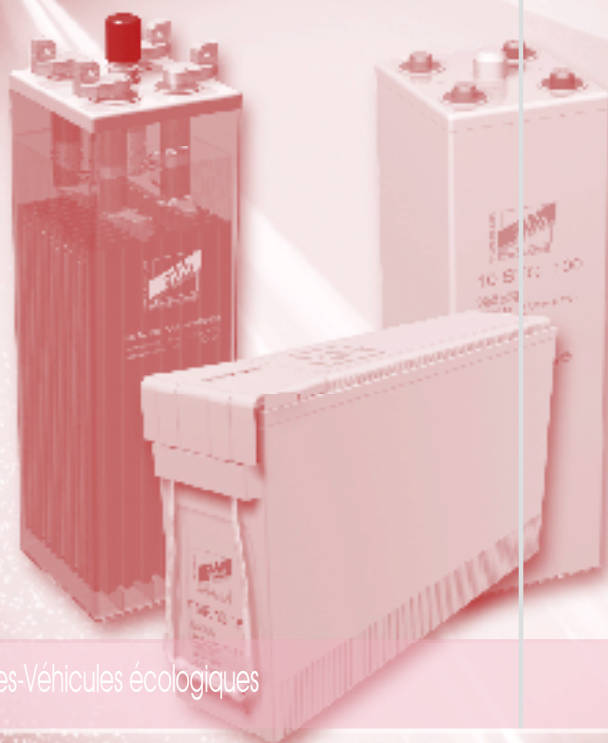

Batterie -Veicoli ecologici

Batteries -Ecological Vehicles Batteries-Véhicules écologiques



www.faam.com

STA



VASO APERTO
EUROBAT "Long Life" (15 anni)

codice FAAM	TEN V	CAPACITA' NOMINALE Ah 20°C				TERMINALI Terminals TER	DIMENSIONI				PESO Kg	
		10h	5h	3h	1h		LUNG L	LARG W	ALT h	INT INT		
SERIE STA VASO APERTO												
2STA55	2	100	82	72	48	2	103	206	432	//	9,7	
3STA55	2	150	123	108	72	2	103	206	432	//	14,5	
4STA55	2	200	164	144	96	2	103	206	432	//	19,5	
5STA55	2	250	205	180	120	2	124	206	432	//	22,0	
6STA55	2	300	246	216	144	2	145	206	432	//	26,0	
5STA70	2	350	287	252	168	2	124	206	548	//	32,5	
6STA70	2	420	345	302	202	2	145	206	548	//	34,5	
7STA70	2	490	402	353	236	2	166	206	548	//	37,5	
5STA100	2	500	410	360	240	2	145	206	723	//	46,0	
6STA100	2	600	492	432	288	2	145	206	723	//	49,0	
7STA100	2	700	574	504	337	4	210	191	723	80	55,0	
8STA100	2	800	656	576	385	4	210	191	723	80	62,0	
10STA100	2	1000	820	720	480	4	210	233	723	110	82,5	
12STA100	2	1200	984	863	577	4	210	275	723	140	97,0	
10STA125	2	1250	1025	900	600	4	210	233	873	140	92,0	
12STA125	2	1500	1230	1080	720	4	210	275	873	140	110,0	
14STA125	2	1750	1435	1260	840	4	210	275	873	140	136,0	
16STA125	2	2000	1640	1440	960	6	214	399	849	110	160,0	
18STA125	2	2250	1844	1619	1082	8	212	487	849	110	178,0	
20STA125	2	2500	2050	1800	1200	8	212	487	849	110	198,0	
22STA125	2	2750	2255	1980	1320	8	212	576	849	140	216,0	
24STA125	2	3000	2460	2160	1440	8	212	576	849	140	234,0	
26STA125	2	3250	2665	2340	1560	8	212	576	849	140	250,0	
28STA125	2	3500	2870	2520	1680	8	212	576	849	140	266,0	

STG



GEL
EUROBAT "Long Life" (15 anni)


codice FAAM	TEN V	CAPACITA' NOMINALE Ah 20°C				TERMINALI Terminals TER	LUNG L	LARG W	ALT h	ALT tot. H	PESO Kg
		10h	5h	3h	1h						
SERIE STG-GEL											
4STG50	2	200	164	144	96	M8	103	206	355	383	20,0
5STG50	2	250	205	180	120	M8	124	206	355	383	24,0
6STG50	2	300	246	216	144	M8	145	206	355	383	29,0
5STG70	2	350	287	252	168	M8	124	206	471	499	31,0
6STG70	2	420	345	302	202	M8	145	206	471	499	36,0
7STG70	2	500	410	360	240	M8	166	206	471	499	42,0
6STG100	2	600	492	432	288	M8	145	206	646	674	50,0
8STG100	2	800	656	576	385	M8	210	191	646	674	68,0
10STG100	2	1000	820	720	480	M8	210	233	646	674	82,0
12STG100	2	1200	984	863	577	M8	210	275	646	674	97,0
12STG125	2	1500	1230	1080	720	M8	210	275	796	824	120,0
16STG125	2	2000	1640	1440	960	M8	212	399	772	800	160,0
20STG125	2	2500	2050	1800	1200	M8	212	487	772	800	200,0
24STG125	2	3000	2460	2160	1440	M8	212	576	772	800	240,0

FLG



GEL
EUROBAT "Long Life" (15 anni)

codice FAAM	TEN V	20h	CAPACITA' NOMINALE Ah 20°C				TERMINALI Terminals TER	LUNG L	LARG W	ALT h	ALT tot. H	PESO Kg
			10h	5h	3h	1h						
SERIE FLG-GEL												
FLG6-100	6		100	82	72	48	M6	194	170	205	210	16,8
FLG6-200	6		200	164	144	96	T5	321	176	226	246	32,5
FLG12-33	12	33	28	23	20,2	13,4	T7	195	130	159	180	10,5
FLG12-42	12	42	37	30	26,7	17,8	T4	197	165	170	170	13,8
FLG12-60	12	60	50	41	36	24	T5	260	168	211	233	20,8
FLG12-70	12	70	65	53	46,8	31,2	T5	350	167	179	186	22,3
FLG12-100	12	100	85	69,5	61,2	40,8	T5	330	171	214	224	32,5
FLG12-120	12	120	100	82	72	48	T5	409	176	225	225	38,0
FLG12-134	12	134	115	94,5	82,8	55,2	M8	342	172	280	285	43,5
FLG12-150	12	150	135	110,5	97,2	64,8	T5	485	172	240	240	47,5
FLG12-200	12	200	180	147,5	129,6	86,4	T5	522	238	218	238	66,0



www.faam.com

FLL



VRLA AGM
EUROBAT "Long Life" (12 anni)

codice FAAM	TEN V	Ah 20h	CAPACITA' NOMINALE Ah 20°C				TERMINALI Terminals TER	DIMENSIONI				PESO Kg
			10h	5h	3h	1h		LUNG L	LARG W	ALT h	ALT tot. H	
SERIE FLL												
FLL12-17	12	17	15	12,5	11,5	9,5	M5	181	77	167	167	5,60
FLL12-24	12	24	22	18,5	17,0	13,5	M5	166	176	128	128	8,50
FLL12-31	12	31	25	21,0	19,0	15,5	M6	194	133	172	172	11,20
FLL12-42	12	42	37	31,0	28,5	23,0	M6	198	166	172	172	14,20
FLL12-60	12	60	50	42,0	38,5	31,0	M6	259	168	208	220	23,00
FLL12-70	12	70	65	54,5	50,0	40,5	M6	350	167	178	178	22,90
FLL12-100	12	100	85	71,5	65,5	53,0	M8	331	176	214	218	30,50
FLL12-120	12	120	100	85,0	77,0	62,0	M8	407	174	209	233	36,50
FLL12-150	12	150	135	113,5	104,0	84,0	M8	485	172	240	240	47,00
FLL12-200	12	200	180	151,0	140,0	111,5	M8	521	269	203	208	60,00
FLL6-100	6		100	85,0	77,0	62,0	M8	195	170	206	213	15,50
FLL6-150	6		150	126,0	115,5	93,0	M8	260	180	247	254	24,00
FLL6-180	6		180	151,5	140,0	111,5	M8	306	168	222	229	27,00
FLL6-200	6		200	170,0	154,0	124,0	M8	323	178	224	231	30,00
FLL6-225	6		225	189,0	173,0	140,0	M8	260	180	247	254	30,50
FLL100	2		100	85,0	77,0	62,0	M8	101	163	200	207	7,50
FLL200	2		200	170,0	154,0	124,0	M8	105	183	359	371	15,50
FLL300	2		300	255,0	231,0	186,0	M8	146	183	359	371	22,00
FLL400	2		400	340,0	308,0	248,0	M8	186	183	359	371	28,50
FLL500	2		500	425,0	385,0	310,0	M8	227	183	359	371	35,00
FLL600	2		600	510,0	462,0	372,0	2xM8	268	183	359	371	42,50
FLL800	2		800	680,0	616,0	496,0	2xM8	169	229	600	612	60,00
FLL1000	2		1000	850,0	770,0	620,0	2xM8	204	229	600	612	73,00
FLL1500	2		1500	1275,0	1155,0	930,0	2xM8	291	229	600	612	107,00

FMR



FRONT TERMINAL
EUROBAT "Long Life" (12 anni)

codice FAAM	TEN V	Ah 20h	CAPACITA' NOMINALE Ah 20°C				TERMINALI Terminals TER	DIMENSIONI				PESO Kg
			10h	5h	3h	1h		LUNG L	LARG W	ALT h	ALT tot. H	
SERIE FMR												
FMR12-50	12		50	42,5	38,5	31,0	M6	390	105	227	227	21,50
FMR12-55	12		55	46,0	42,5	34,0	M6	276	106	222	222	18,10
FMR12-75	12		75	63,0	58,0	46,5	M6	558	105	227	227	31,00
FMR12-93	12		93	78,5	71,5	57,5	M6	395	105	270	270	30,00
FMR12-100	12		100	85,0	77,0	62,0	M8	558	125	227	227	39,00
FMR12-105	12		105	89,0	81,0	65,0	M6	508	110	238	238	34,00
FMR12-125	12		125	105,0	96,0	77,5	M8	558	125	270	270	49,00
FMR12-150	12		150	127,5	115,5	93,0	M8	558	125	310	310	57,00

FHP



VRLA AGM
EUROBAT "Long Life" (15 anni)

codice FAAM	TEN V	Ah 20h	WATT DI SCARICA /EI (A 25°C) 1,67V Fin			TERMINALI Terminals TER	DIMENSIONI				PESO Kg	
			5'	15'	30'		LUNG L	LARG W	ALT h	ALT tot. H		
SERIE FHP												
FHP12-24	12	24		165,0	100,0	58,0	M5	166	176	128	128	8,50
FHP12-33	12	33		285,0	140,0	75,0	M6	196	130	163	168	11,20
FHP12-42	12	42		232,0	142,0	90,0	M6	198	166	172	172	14,20
FHP12-55	12	55		380,0	200,0	124,0	M6	229	138	208	213	17,50
FHP12-75	12	75		524,0	270,0	179,0	M6	259	168	208	220	25,40
FHP12-90	12	90		616,0	310,0	205,0	M6	307	169	208	213	28,20
FHP12-100	12	100		723,0	370,0	254,0	M8	331	176	214	218	33,50
FHP12-120	12	120		780,0	470,0	270,0	M8	407	174	209	233	36,50
FHP12-134	12	134		750,0	475,0	325,0	M8	340	173	280	286	44,20
FHP12-150	12	150		860,0	530,0	340,0	M8	485	172	240	240	47,00


FTS



VRLA AGM
EUROBAT "Long Life" (9 anni)

codice FAAM	TEN V	Ah 20h	WATT DI SCARICA /EI (A 25°C) 1,67V Fin			TERMINALI Terminals TER	DIMENSIONI				PESO Kg	
			5'	15'	30'		LUNG L	LARG W	ALT h	ALT tot. H		
SERIE FTS												
FTS12-1.2	12	1,2		40,3	20,2	12,7	F1	97	44	53	59	0,59
FTS12-2.0	12	2,0		67,2	33,6	21,1	F1	178	35	60	66	0,97
FTS12-3.0	12	3,0		101,0	50,4	31,7	F1	135	67	61	66	1,33
FTS12-4.0	12	4,0		135,0	67,2	42,3	F1	90	70	101	108	1,60
FTS12-7.2	12	7,2		252,0	126,0	79,2	F1	151	65	95	101	2,30
FTS12.12	12	12,0		403,0	202,0	127,0	F1/F2	151	99	95	101	3,90
FTS6-1.2	6	1,2		20,2	10,1	6,4	F1	97	24	52	58	0,31
FTS6-4.0	6	4,0		67,5	33,6	21,2	F1	70	47	100	106	0,80
FTS6-7.0	6	7,0		126,0	63,0	39,6	F1	150	34	95	101	1,15
FTS6-12.0	6	12,0		202,0	101,0	63,5	F1	151	50	93	99	1,90

LOOK AHEAD

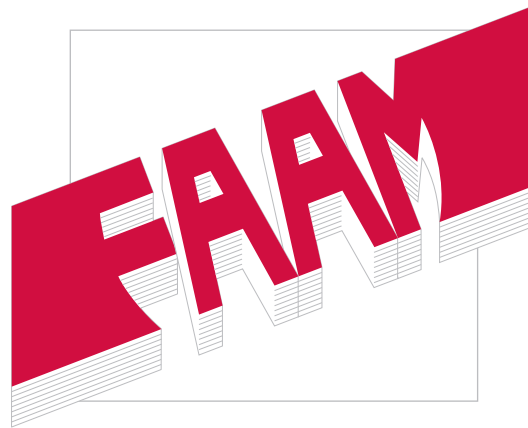

www.faam.com